

| | | |
|--------------|--------------------|----|
| V_{DRM} | = 1600 | V |
| $I_{T(AV)M}$ | = 3370 | A |
| $I_{T(RMS)}$ | = 5292 | A |
| I_{TSM} | = 49×10^3 | A |
| $V_{(T0)}$ | = 0.94 | V |
| r_T | = 0.066 | mW |

Phase Control Thyristor

5STP 34H1601

Doc. No. 5SYA1065-01 March 05

- Low on-state and switching losses
- Designed for traction, energy and industrial applications
- Optimum power handling capability

Blocking

Maximum rated values ¹⁾

| Symbol | Conditions | 5STP 34H1601 | 5STP 34H1401 | 5STP 34H1201 |
|--------------------|--|-----------------------|--------------|--------------|
| V_{DRM}, V_{RRM} | $f = 50 \text{ Hz}, t_p = 10 \text{ ms}$ | 1600 V | 1400 V | 1200 V |
| dV/dt_{crit} | Exp. to 1070 V, $T_{vj} = 125^\circ\text{C}$ | 1000 V/ μs | | |

Characteristic values

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-------------------------|-----------|---------------------------------------|-----|-----|-----|------|
| Forward leakage current | I_{DRM} | $V_{DRM}, T_{vj} = 125^\circ\text{C}$ | | | 200 | mA |
| Reverse leakage current | I_{RRM} | $V_{RRM}, T_{vj} = 125^\circ\text{C}$ | | | 200 | mA |

Mechanical data

Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|----------------|--------|------------------|-----|-----|-----|----------------|
| Mounting force | F_M | | 45 | 50 | 55 | kN |
| Acceleration | a | Device unclamped | | | 50 | m/s^2 |
| Acceleration | a | Device clamped | | | 100 | m/s^2 |

Characteristic values

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---------------------------|--------|------------|-----|-----|------|------|
| Weight | m | | | | 0.93 | kg |
| Surface creepage distance | D_s | | 36 | | | mm |
| Air strike distance | D_a | | 15 | | | mm |

¹⁾ Maximum rated values indicate limits beyond which damage to the device may occur

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



On-state

Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-----------------------------------|--------------|--|-----|-----|---------------------|----------------------|
| Average on-state current | $I_{T(AV)M}$ | Half sine wave, $T_c = 70^\circ\text{C}$ | | | 3370 | A |
| RMS on-state current | $I_{T(RMS)}$ | | | | 5292 | A |
| Peak non-repetitive surge current | I_{TSM} | $t_p = 10\text{ ms}$, $T_{vj} = 125^\circ\text{C}$, $V_D = V_R = 0\text{ V}$ | | | 49×10^3 | A |
| Limiting load integral | I^2t | | | | 12.01×10^6 | A^2s |
| Peak non-repetitive surge current | I_{TSM} | $t_p = 8.3\text{ ms}$, $T_{vj} = 125^\circ\text{C}$, $V_D = V_R = 0\text{ V}$ | | | 52.3×10^3 | A |
| Limiting load integral | I^2t | | | | 11.35×10^6 | A^2s |

Characteristic values

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-------------------|------------|---|-----|------|-------|------------------|
| On-state voltage | V_T | $I_T = 4000\text{ A}$, $T_{vj} = 125^\circ\text{C}$ | | | 1.2 | V |
| Threshold voltage | $V_{(T0)}$ | $I_T = 4200\text{ A} - 12500\text{ A}$, $T_{vj} = 125^\circ\text{C}$ | | | 0.94 | V |
| Slope resistance | r_T | | | | 0.066 | $\text{m}\Omega$ |
| Holding current | I_H | $T_{vj} = 25^\circ\text{C}$ | | 170 | | mA |
| | | $T_{vj} = 125^\circ\text{C}$ | | 90 | | mA |
| Latching current | I_L | $T_{vj} = 25^\circ\text{C}$ | | 1500 | | mA |
| | | $T_{vj} = 125^\circ\text{C}$ | | 1000 | | mA |

Switching

Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---|----------------|--|-----|-----|------|------------------------|
| Critical rate of rise of on-state current | di/dt_{crit} | $T_{vj} = 125^\circ\text{C}$, $I_{TRM} = \text{A}$, Cont. $f = 50\text{ Hz}$ | | | 200 | $\text{A}/\mu\text{s}$ |
| Critical rate of rise of on-state current | di/dt_{crit} | $V_D \leq 2950\text{ V}$, $I_{FG} = 2\text{ A}$, $t_r = 0.3\ \mu\text{s}$ Cont. $f = 1\text{ Hz}$ | | | 1000 | $\text{A}/\mu\text{s}$ |
| Circuit-commutated turn-off time | t_q | $T_{vj} = 125^\circ\text{C}$, $I_{TRM} = 4000\text{ A}$, $V_R = 100\text{ V}$, $di_T/dt = -12.5\text{ A}/\mu\text{s}$, $V_D \leq 0.67 \cdot V_{DRM}$, $dv_D/dt = 50\text{ V}/\mu\text{s}$ | | 200 | | μs |

Characteristic values

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-------------------------|----------|--|-----|------|-----|----------------|
| Recovery charge | Q_{rr} | $T_{vj} = 125^\circ\text{C}$, $I_{TRM} = 4000\text{ A}$, $V_R = 100\text{ V}$, $di_T/dt = -12.5\text{ A}/\mu\text{s}$ | | 2800 | | μAs |
| Gate turn-on delay time | t_{gd} | $V_D = 0.4 \cdot V_{RM}$, $I_{FG} = 2\text{ A}$, $t_r = 0.3\ \mu\text{s}$, $T_{vj} = 25^\circ\text{C}$ | | | 2 | μs |

Triggering

Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---------------------------|--------------------|------------|-----|-----|-----|------|
| Peak forward gate voltage | V _{FGM} | | | | 12 | V |
| Peak forward gate current | I _{FGM} | | | | 10 | A |
| Peak reverse gate voltage | V _{RGM} | | | | 10 | V |
| Mean forward gate power | P _{G(AV)} | | | | 5 | W |

Characteristic values

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|----------------------|-----------------|--------------------------|------|-----|-----|------|
| Gate-trigger voltage | V _{GT} | T _{vj} = -40 °C | | | 4 | V |
| | | T _{vj} = 25 °C | | | 3 | |
| | | T _{vj} = 125 °C | 0.25 | | 2 | |
| Gate-trigger current | I _{GT} | T _{vj} = -40 °C | | | 500 | mA |
| | | T _{vj} = 25 °C | | | 250 | |
| | | T _{vj} = 125 °C | 10 | | 150 | |

Thermal

Maximum rated values ¹⁾

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|--------------------------------------|------------------|------------|-----|-----|-----|------|
| Operating junction temperature range | T _{vj} | | -40 | | 125 | °C |
| Storage temperature range | T _{stg} | | -40 | | 125 | °C |

Characteristic values

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|-------------------------------------|-----------------------|--|-----|-----|------|------|
| Thermal resistance junction to case | R _{th(j-c)} | Double-side cooled F _m = 45...55 kN | | | 10 | K/kW |
| | R _{th(j-c)A} | Anode-side cooled F _m = 45...55 kN | | | 16 | K/kW |
| | R _{th(j-c)C} | Cathode-side cooled F _m = 45...55 kN | | | 26.5 | K/kW |
| Thermal resistance case to heatsink | R _{th(c-h)} | Double-side cooled F _m = 45...55 kN | | | 3 | K/kW |
| | R _{th(c-h)} | Single-side cooled F _m = 45...55 kN | | | 6 | K/kW |

Analytical function for transient thermal impedance:

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_{th i} (1 - e^{-t/t_i})$$

| i | 1 | 2 | 3 | 4 |
|--------------------------|--------|--------|--------|--------|
| R _{th i} (K/kW) | 6.730 | 1.440 | 0.650 | 1.160 |
| τ _i (s) | 0.4871 | 0.1468 | 0.0677 | 0.0079 |

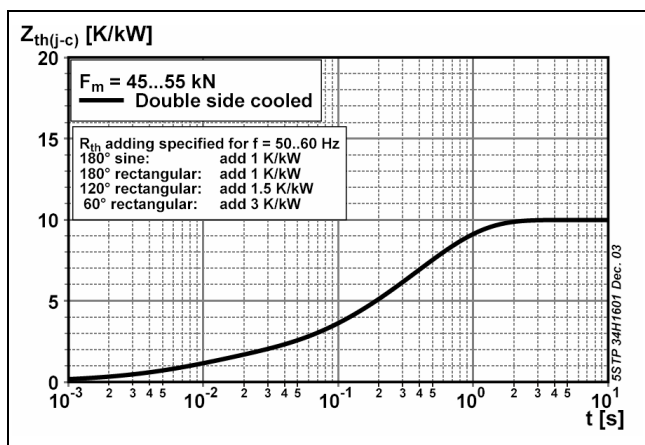


Fig. 1 Transient thermal impedance junction-to case.

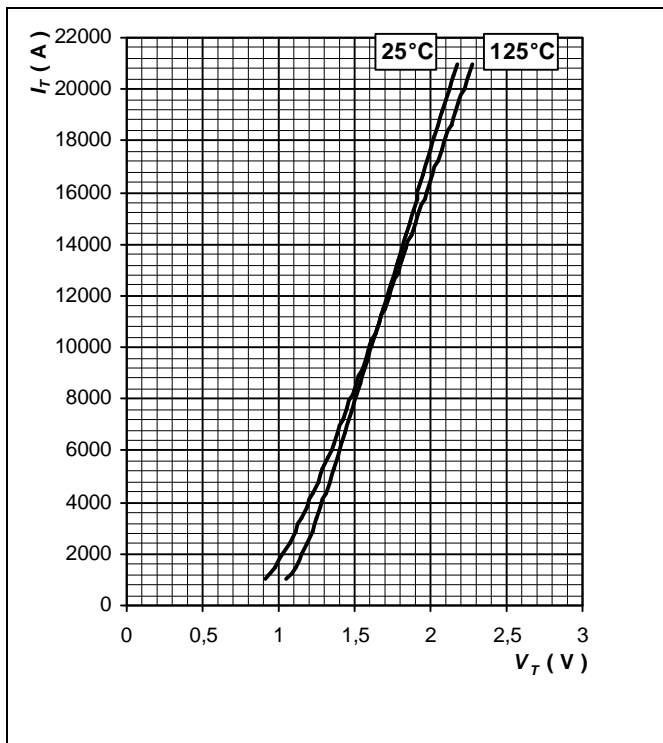


Fig. 2 Max. on-state voltage characteristics

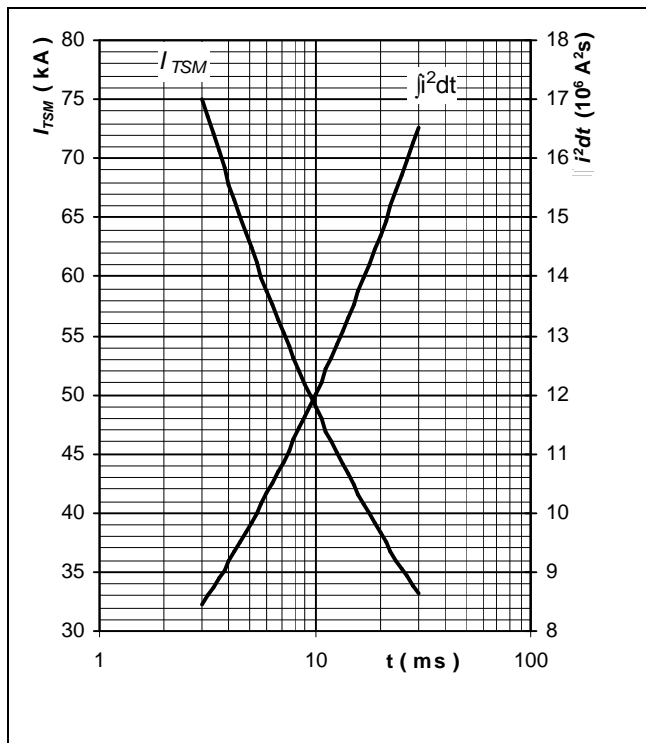


Fig. 3 Surge forward current vs. pulse length. Half sine wave, single pulse, $V_R = 0$ V

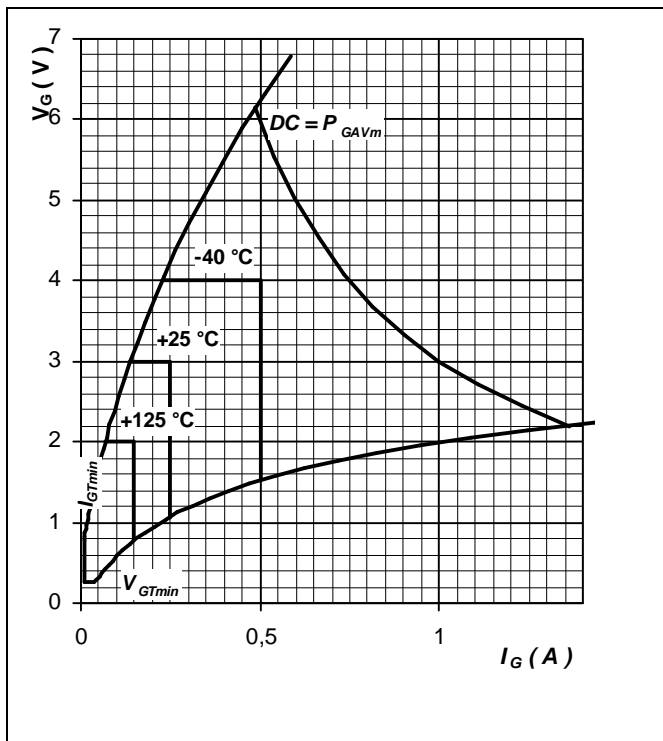


Fig. 4 Gate trigger characteristics

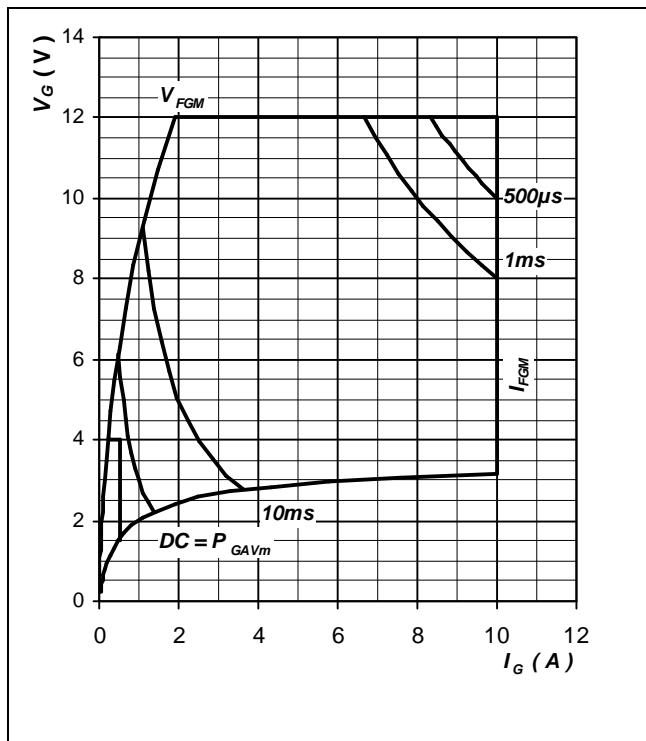


Fig. 5 Gate trigger characteristics

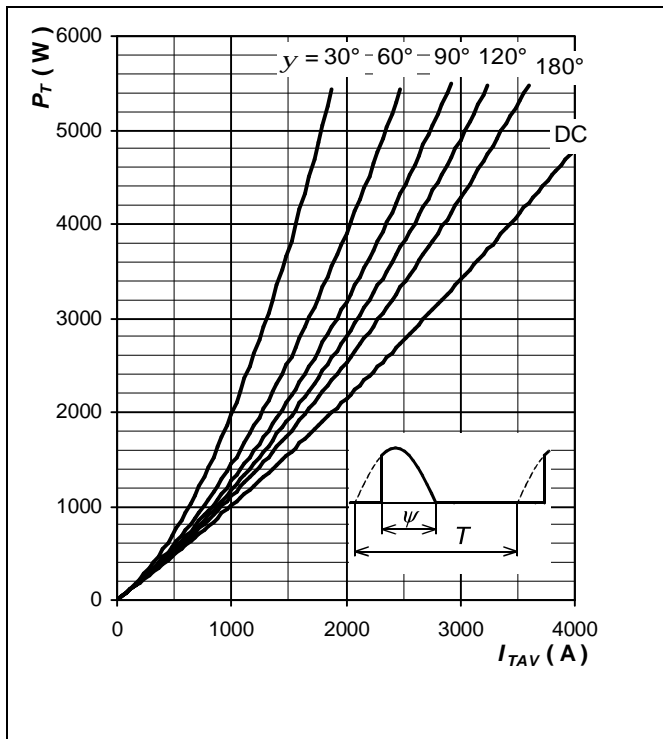


Fig. 6 Forward power loss vs. average forward current, sine waveform, $f = 50 \text{ Hz}$, $T = 1/f$

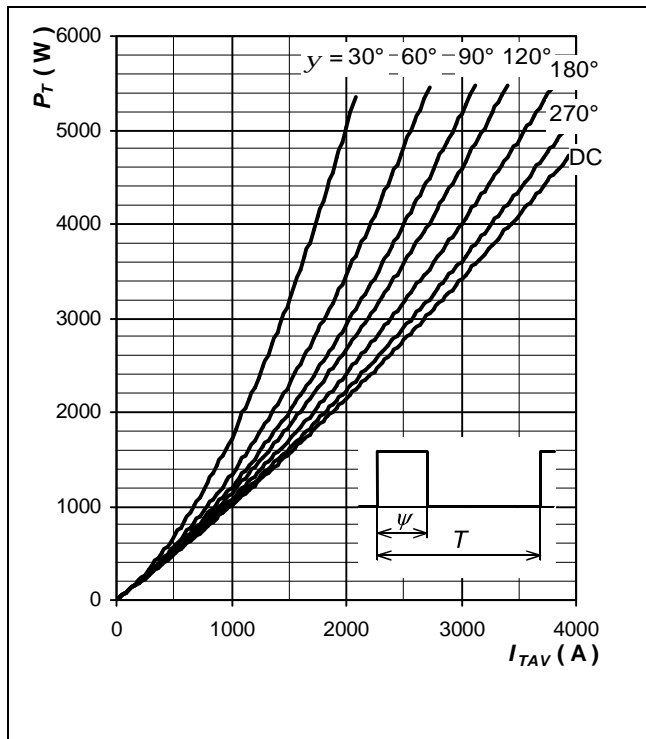


Fig. 7 Forward power loss vs. average forward current, square waveform, $f = 50 \text{ Hz}$, $T = 1/f$

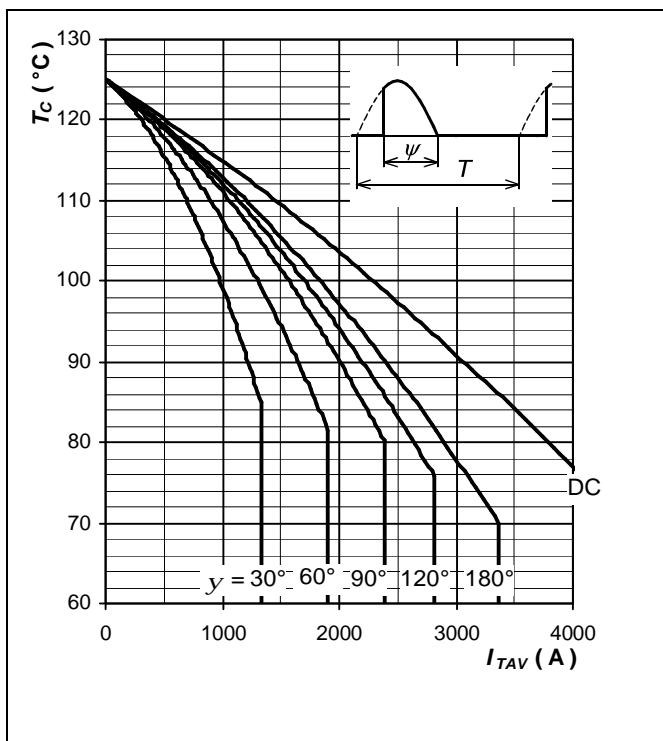


Fig. 8 Max. case temperature vs. average forward current, sine waveform, $f = 50 \text{ Hz}$, $T = 1/f$

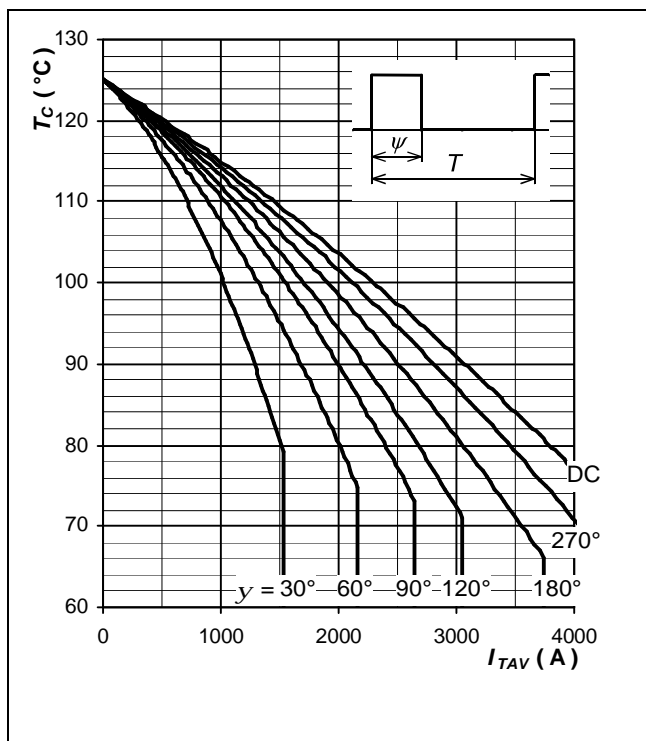


Fig. 9 Max. case temperature vs. average forward current, square waveform, $f = 50 \text{ Hz}$, $T = 1/f$

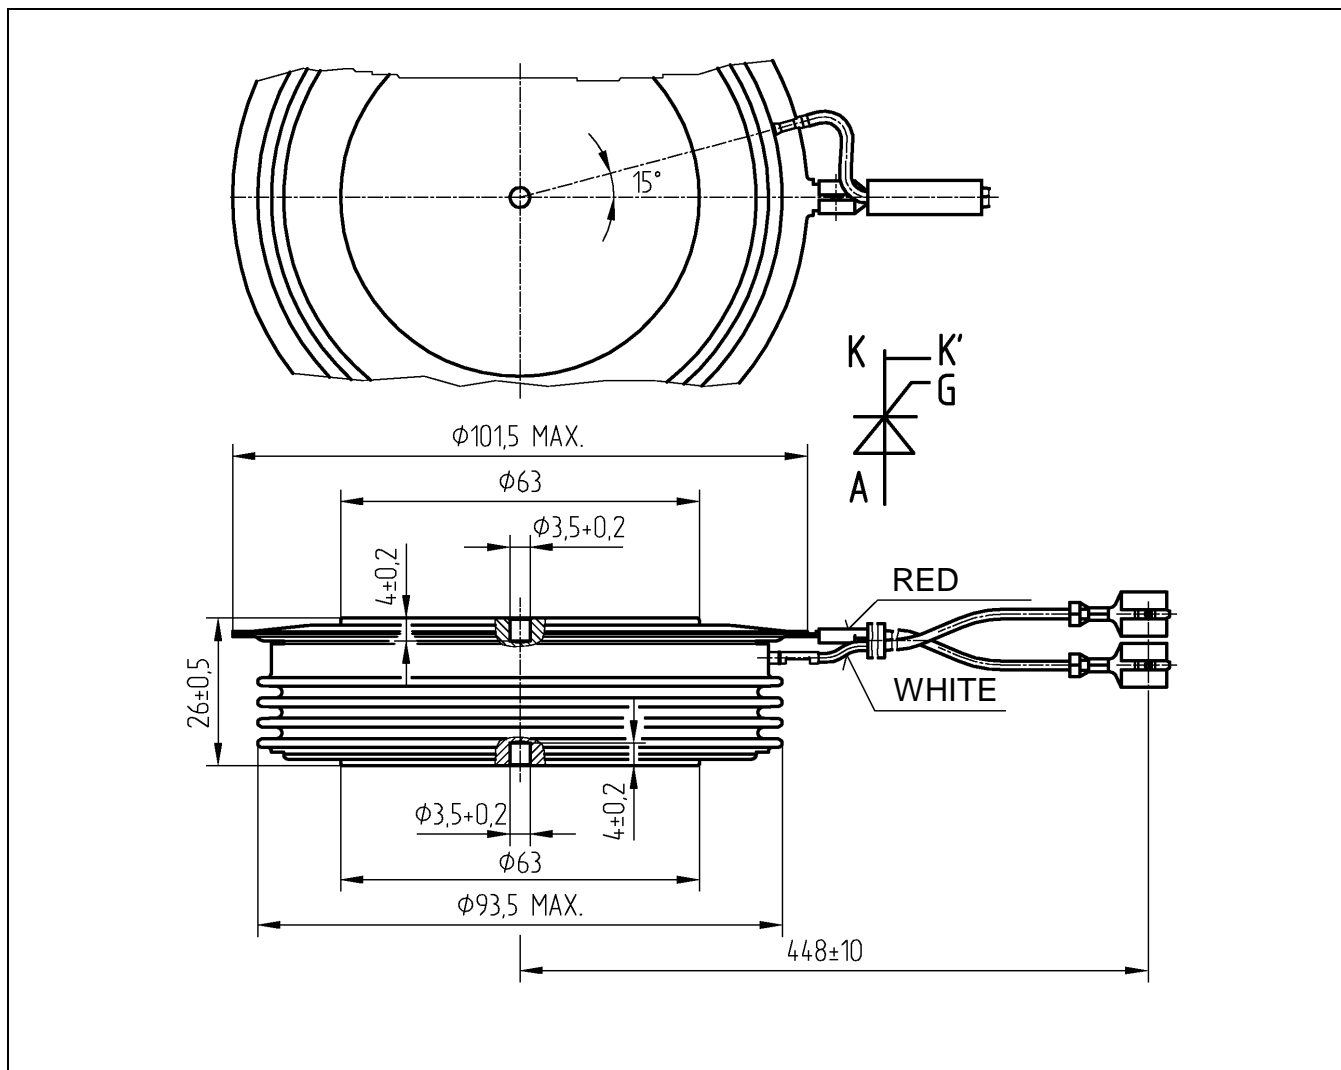


Fig. 10 Device Outline Drawing.

Related application notes:

| Doc. Nr | Titel |
|-----------|---|
| 5SYA2020 | Design of RC-Snubber for Phase Control Applications |
| 5SYA2034 | Gate-drive Recommendations for PCT's |
| 5SYA 2036 | Recommendations regarding mechanical clamping of Press Pack High Power Semiconductors |

Please refer to <http://www.abb.com/semiconductors> for actual versions.

ABB Switzerland Ltd, Semiconductors reserves the right to change specifications without notice.



ABB Switzerland Ltd
Semiconductors
Fabrikstrasse 3
CH-5600 Lenzburg, Switzerland

Doc. No. 5SYA1065-01 March 05

Telephone +41 (0)58 586 1419
Fax +41 (0)58 586 1306
Email abbsem@ch.abb.com
Internet www.abb.com/semiconductors